

COR-553H

INDOOR HIGH RESOLUTION FULLSIZE CAMERA w/ AUTO IRIS CONTROL

FEATURES


- 420TV LINE RESOLUTION
- 1/3" SONY SUPER HAD CCD
- NON POLARIZED POWER CONNECTOR
- AUTO IRIS CONTROL
- ACCEPTS C OR CS MOUNT LENSES




POWER ON LED
RED LED INDICATOR IS ON WHEN POWER IS AVAILABLE

BNC VIDEO CONNECTOR
PROVIDES COMPOSITE VIDEO OUTPUT AT 1Vp-p LEVEL (NOMINAL), 75 ohm impedance

AUTO-IRIS CONTROL CONNECTOR
MANUAL SWITCH FOR SELECTING BACK LIGHT COMPENSATION OR TURNING OFF COMPENSATION ENTIRELY. USEFUL IN CERTAIN LIGHT/ ENVIRONMENTAL CONDITIONS

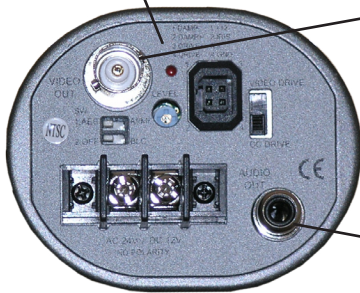


RCA AUDIO CONNECTOR
OPTIONAL AUDIO OUTPUT NOT AVAILABLE ON ALL MODELS. PROVIDES AUDIO SIGNAL AT 2Vp-p (NOMINAL), 50 ohm IMPEDANCE

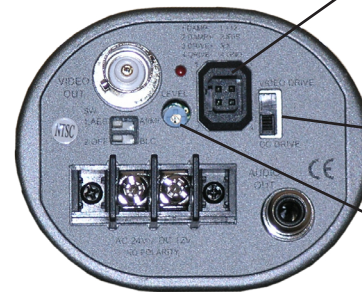


AUTO-IRIS CONTROL SWITCH
SET AUTO-IRIS CONTROL TO DC (DIRECT) OR VIDEO

VR LEVEL ADJUSTMENT
ADJUSTMENT AVAILABLE TO DC DRIVE AUTO -IRIS

NON-POLARIZED POWER CONNECTOR
POWER REQUIREMENT IS 12VDC OR 24VAC, MAKING INSTALLATION EASY




A1/AES SWITCH
MANUAL SWITCH FOR SETTING EITHER AUTO-ELECTRONIC SHUTTER OR AUTO IRIS/MANUAL-IRIS



BACKLIGHT COMPENSATION SWITCH
BACKLIGHT COMPENSATION IS THE ABILITY OF A CAMERA TO COMPENSATE IN CASES WHERE A SUBJECT WITH A LARGE AMOUNT OF BACKGROUND LIGHT WOULD OTHERWISE BE OBSCURED BY VIDEO BLOOMING OF SILHOUETTING. THIS MANUAL SWITCHING ALLOWS FOR SELECTING BACKLIGHT COMPENSATION OR TURNING OFF COMPENSATION ENTIRELY. USEFUL IN CERTAIN LIGHT/ENVIRONMENTAL CONDITIONS

SPECIFICATIONS


Video Sensor	1/3" Sony Super HAD CCD
Resolution	480 TV Lines
Number of Pixels	NTSC - 510 (H) x 492 (V)
Scanning System	2:1 Interface
Light Level	0.1 Lux / F1.2
Video Signal synchronization	Negative internal
Video Signal Level	1 Vp-p, 75 Ohm impedance
Signal to Noise Ratio	>48dB
Gamma Correction	0.45
Auto-White Balance	YES
Gain Control	Full Auto-Gain Control (AGC)
BLC	YES (on/off manual switch)
Auto Electronic Shutter	1/60 - 1/100,000 sec. (on/off manual switch)
Auto Iris Control	Video drive lens & DC drive lens support
Audio Output	2Vp-p, 50 Ohm impedance
Power	12VDC or 24VAC (installers choice), non polarized input 3.2 watts



Mounting



Mounting



PHYSICAL	
Dimension (inches)	121mm x 54mm (4.75" x 2.125")
Weight	400g (14.11oz)
ENVIRONMENTAL	
Operating Temperature	14°F to +122°F (-10°C to +50°C)
Storage Temperature	-22°F to +140°F (-30°C to +60°C)
Water/Weatherproof Level	None (indoor only, unless using an outdoor housing)

COR-553H

