

# COR-NUBIX8RX

## 960H HIGH RESOLUTION REAL TIME H.264 DVR



REMOTE INCLUDED



Korean Certification

### KEY FEATURES

- SIMULTANEOUS ALL CHANNEL PLAYBACK
- HDMI HIGH RESOLUTION OUTPUT
- INTUITIVE GUI
- ADVANCED SMARTPHONE FUNCTIONS
- 128 CHANNEL CMS
- AUTOMATIC REMOTE BACKUP SOFTWARE
- REMOTE TRIGGER FOR ALARM OUTPUTS
- GIGABIT LAN
- ANALOG CAMERA INPUTS
- MADE IN KOREA
- RS485 FOR PTZ DEVICES


### SPECIFICATIONS



FRONT VIEW



REAR VIEW

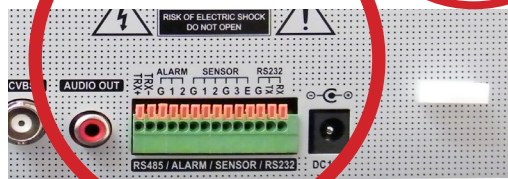

<b>* DISPLAY</b>	
Speed	Real time
Resolution	1280 x 1024, 1280 x 720, 1024 x 768, 720x576, 720x480
Split mode	1, 4, 6, 9 PIP, Digital Zoom
OSD	Graphic User Interface (Multilingual)
<b>* RECORDING</b>	
960H (Speed / Resolution)	120/100@WCIF(NTSC/PAL) 120/100@WHD1(NTSC/PAL) 120/100@WD1(NTSC/PAL)
D1 (Speed / Resolution)	120/100@CIF(NTSC/PAL) 120/100@HD1(NTSC/PAL) 120/100@D1(NTSC/PAL)
Compression	Hardware H.264 codec
Picture Quality	Very High, High, Standard, Low
Mode	Time-lapse, Event, Time & Event, Emergency (Panic)
<b>* PLAYBACK</b>	
Display	1, 4, 6, 9 Digital Zoom
Search Mode	Calendar Search, Event Search, Text-In Search, Go to Time
Playback Mode	Multi Channel Normal & Reverse Play, RW & FF ( x2, x4, x8, x16, x32), Frame to Frame, Pause
<b>* VIDEO AND AUDIO</b>	
Video Input	8 BNC (No Loop-out)
Video Output	1 HDMI, 1 VGA, 1 CVBS (Spot)
Audio Input	8 RCA (Line Input)
Audio Output	1 HDMI, 1 RCA (Line Output)
<b>* DEVICE</b>	
Sensor Input	4 Input (3+Emergency), 4 inputs configurable NO/NC, max.input voltage 6 VDC, 50mA
Alarm output	2 Port, Open Collector output, 40V max@100mA
I/O Interface	1 RS232, 1 RS485, 2 USB(Front)
OSD	Graphic User Interface (Multilingual)
<b>* NETWORK</b>	
Interface	Ethernet (10/100/1000 Base)
Protocol	TCP/IP, HTTP, DHCP, ADSL(PPPoE)
Application	Live, Playback, Setup, Notification (Callback, E-Mail)
Web browser	Internet Explorer 7 or higher
Playback Mode	Multi Channel Normal & Reverse Play, RW & FF ( x2, x4, x8, x16, x32), Frame to Frame, Pause

<b>* STORAGE &amp; BACKUP</b>	
Storage	4 x SATA HDD
Backup	External HDD(USB), External USB memory.
<b>* POWER</b>	
Operating Temperature	5°C ~ 40°C / 41°F~104°F
Operating Humidity	0~80% (non-condensing)
Power Input	DC12V, 5A (60W)
<b>* PHYSICAL</b>	
Color	Black / reflective front panel
Dimensions (W x H x D)	430 x 92.5 x 428 (mm) 16.9 x 3.64 x 16.8 (inches)
Weight	5.5 (kg) 12.1 (pounds) (without HDD,ODD)
Control	Front Panel Button, USB Mouse, Remote control
<b>* CERTIFICATIONS</b>	
Approval	FCC, CE, KC
ROHS	RoHS Compliance

COR-NUBIX8RX

