
COR-PS8DCB

12VDC REGULATED POWER SUPPLY with 8 OUTPUTS & ALARM

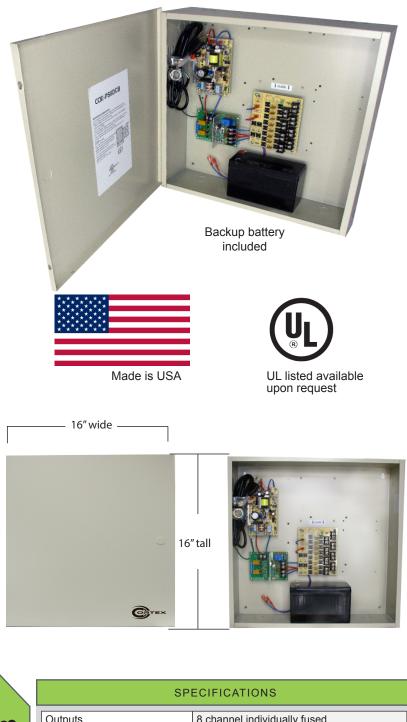

	SPECIFICATIONS	
	Outputs	8 channel individually fused
	Output Fuses	500mA amp rated, 8 amps total
	Output Voltage	12VDC
	Power	115VAC 50/60Hz, 1 amp input
	Protection	Surge, PTC
	LED	AC/DC power indicator
	Certifications	UL Listed
	Regulated Outputs	Electronically
	Dimensions	16" (h) x 16" (w) x 4.5" (d) 406mm (h) x 406mm (w) x 114mm (d)
	Wiring Knockouts	Combination 12" and 3/4" knockouts

KEY BENEFITS

- Battery backup (battery included)
- 8 Channel PTC protected outputs
- Electronically regulated outputs
- 115VAC 50/60Hz 1.45 amp input
- 4 amps of total continuous supply
- AC/DC power LED Indicator
- Input fuse rated @ 3.5 amps

DESCRIPTION

Use this power supply for CCTV cameras, heaters, and other video accessories. This 12VDC power supply has 8 PTC protected outputs and is designed for permanent installation. These regulated outputs are PTC protected with surge suppression. Power output fuses are rated @ 500mA for each channel. This unit will maintains your camera synchronization. It has a strong metal cabinet with knockouts, and can be secured with a barrel-style lock (included). If you're looking for a wall mounted power supply box for your security camera system , look no further.



Perfect for powering an array of CCTV securtiy camera and other 12VDC devices

COR-PS8DCB

CRTEX'